

IPTZ-25X

4MP 25x IP Speed Dome Camera with Extra Wide View Lens and Red/Blue Strobe Light



IPTZ-25X, 4MP 25×IR Network Speed Dome adopts 1/2.8" progressive scan CMOS chip. With the 15× optical zoom lens, the camera offers more details over expansive areas.

This series of cameras can be widely used for wide ranges of high-definition, such as rivers, roads, railways, airports, squares, parks, scenic spots, and venues, etc.

Outstanding Features

- Captures a large area and great details at the same time
- High quality imaging with 4 MP resolution
- Focuses on human and vehicle targets classification based on deep learning
- Excellent low-light performance with powered-by-Dark Fighter technology and Night ColorVu technology
- Secures an expansive area with 25× optical zoom and 16× digital zoom
- Expansive night view with up to 100 m IR distance & 30 m white light
- Built-in speaker and dual-microphone for real-time high quality audio security
- Active red and blue strobe light and audio alarm to warn intruders off
- Supports 12 VDC & PoE+

Specification

Camera	
Image Sensor	[Bullet channel] 1/2.8" Progressive Scan CMOS, [PTZ channel] 1/2.8" Progressive Scan CMOS
Max. Resolution	[Bullet channel] 2560×1440, [PTZ channel] 2560×1440
Min. Illumination	[Bullet channel]: 0.0005Lux@ (F1.0, AGCON), 0 Luxwith light; [PTZ channel]: Color: 0.005Lux@ (F1.6, AGCON), B/W: 0.001Lux@ (F1.6, AGCON), 0 Luxwith IR
Shutter Speed	1 s to 1/30,000s
Day & Night	ICR
Zoom	[PTZ channel] 25×optical, 16×digital
Slow Shutter	yes
Lens	
Focal Length	[Bullet channel] 2.8mm, [PTZ channel] 5 to 125 mm
FOV	[Bullet channel] horizontal field of view: 96.1°, vertical field of view: 52.1°, diagonal field of view: 113.3°, [PTZ channel] horizontal field of view: 55° to 2.4°, vertical field of view: 33° to 1.4°, diagonal field of view: 61.5° to 2.8°
Focus	auto, manual, semi-auto
Aperture	[Bullet channel]: F1.0; [PTZ channel]: F1.6
Zoom Speed	[PTZ channel]: approx. 2.3 s
Illuminator	
Supplement Light Type	[PTZ channel]: IR; [Bullet channel]: White Light
Supplement Light Range	[PTZ channel]: up to 100m; [Bullet channel]: up to 30m
Smart Supplement Light	Yes
PTZ	
Movement Range (Pan)	360° endless
Movement Range (Tilt)	[Bullet channel] 9° to 21° (manually adjust), [PTZ channel] -15° to 90°
Pan Speed	Pan speed: configurable from 0.1° to 80°/s, preset speed: 80°/s
Tilt Speed	Tilt speed: configurable from 0.1° to 80°/s, preset speed 80°/s
Proportional Pan	yes
Presets	300
Preset Freezing	yes
Patrol Scan	8 patrols, up to 32 presets for each patrol
Pattern Scan	4 pattern scans
ParkAction	preset, frame scan, tilt scan, patrol scan, randomscan, auto scan, pattern scan, panorama scan
3D Positioning	yes
PTZ Status Display	yes
Scheduled Task	Preset, pattern scan, patrol scan, tilt scan, auto scan, randomscan, frame scan, panorama scan, dome reboot, dome adjust, aux output
Power-off Memory	yes
Video	
Main Stream	[Bullet channel] 50 Hz: 25 fps (2560 × 1440, 1920 × 1080, 1280 × 960, 1280 × 720), 60 Hz: 30 fps (2560 × 1440, 1920 × 1080, 1280 × 960, 1280 × 720), [PTZ channel] 50 Hz: 25 fps (2560 × 1440, 1920 × 1080, 1280 × 960, 1280 × 720), 60 Hz: 30 fps (2560 × 1440, 1920 × 1080, 1280 × 960, 1280 × 720)

Sub-Stream	[Bullet channel]: 50 Hz: 25 fps (704 ×576, 640 ×480, 352 ×288) 60 Hz: 30 fps (704 ×480, 640 ×480, 352 ×240) [PTZ channel]: 50 Hz: 25 fps (704 ×576, 640 ×480, 352 ×288) 60 Hz: 30 fps (704 ×480, 640 ×480, 352 ×240)
Third Stream	[Bullet channel]: 50 Hz: 25 fps (1920 ×1080, 1280 ×960, 1280 ×720, 704 ×576, 640 ×480, 352 ×288) 60 Hz: 30 fps (1920 ×1080, 1280 ×960, 1280 ×720, 704 ×480, 640 ×480, 352 ×240) [PTZ channel]: 50 Hz: 25 fps (1920 ×1080, 1280 ×960, 1280 ×720, 704 ×576, 640 ×480, 352 ×288) 60 Hz: 30 fps (1920 ×1080, 1280 ×960, 1280 ×720, 704 ×480, 640 ×480, 352 ×240)
Video Compression	H.265,H.264,MJPEG
Video Bit Rate	32 kbps to 16384 kbps
H.264 Type	main profile,baseline profile,high profile
H.265 Type	main profile
Scalable Video Coding(SVC)	yes
Region of Interest (ROI)	8 fixed regions for each stream
Audio	
Audio Compression	G.711,G.722.1,G.726,MP2L2,PCM,MP3,AAC-LC
Audio Bit Rate	64 Kbps (G.711),16 Kbps (G.722.1),16 Kbps (G.726),32 to 192 Kbps (MP2L2),16 to 64Kbps (AAC-LC),8to 320 Kbps (MP3)
Audio SamplingRate	MP2L2: 16 kHz, 32kHz, 48 kHz,AAC-LC: 16 kHz, 32kHz, 48 kHz,PCM: 8 kHz, 16 kHz, 32kHz, 48 kHz,MP3: 8 kHz, 16 kHz, 32kHz, 48 kHz
Environment Noise Filtering	yes
Network	
Protocols	DHCP,FTP,HTTPS,TCP/IP,ICMP,HTTP,SFTP,DNS,DDNS,RTP,RTSP,RTCP,PPPoE,NTP,UPnP,SMTP,SNMP,IGMP,802.1X,QoS,IPv4/IPv6,UDP,Bonjour,WebSocket,WebSockets
Simultaneous Live View	20
API	ONVIF (Profile S, Profile G, Profile T),ISAPI,SDK,ISUP
User/Host	32
Security	802.1Xauthenticated access,MACaddress binding,Authenticated username and password,IP address filter,HTTPEncryption
Network Storage	NAS (NFS, SMB/CIFS),auto network replenishment (ANR)
Client	iVMS-4200,HikCentral Pro,Hik-Connect
Web Browser	IE 11, Chrome 80+,Firefox 80+,Safari 13+
Image	
ImageParameters Switch	Yes
Image Settings	sharpness,saturation,brightness,contrast
Day/NightSwitch	day, night, auto, scheduled-switch
Wide DynamicRange(WDR)	True WDR
SNR	> 52dB
Defog	Digital defog
ImageStabilization	EIS
Image Enhancement	BLC,HLC,3D DNR

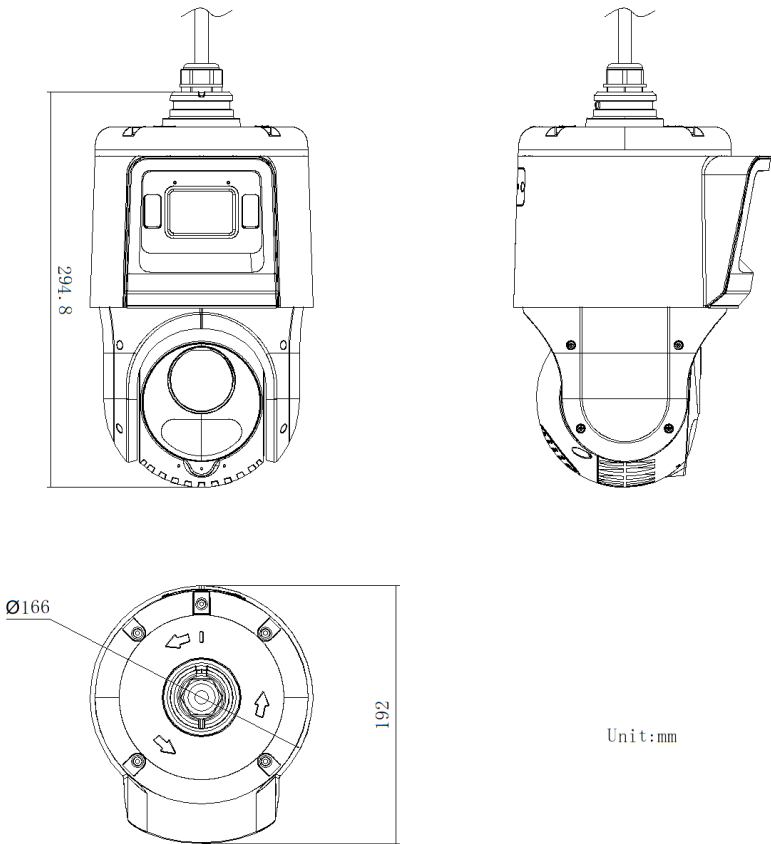
Privacy Mask	[Bullet channel] 8 programmable polygon privacy masks, [PTZ channel] 24 programmable polygon privacy masks; mask color or mosaic configurable
Regional Focus	yes
Regional Exposure	yes
Interface	
Ethernet Interface	RJ45, self-adaptive 10M/100M Ethernet port
On-board Storage	Built-in memory card slot, support microSD/microSDHC/microSDXC card, up to 512 GB
Audio	1 audio input, 2.0 to 2.4Vp-p, 1kΩ±10%, 1 audio output, line level, impedance: 600 Ω
Alarm	1 alarm input, 1 alarm output
Reset	yes
Built-in Microphone	2 built-in microphones, picking up sounds in the radius up to 8 m
Built-in Speaker	1 built-in speaker, with effective distance reaching max. 20 m
Event	
Basic Event	Motion detection, video tampering alarm, exception (network disconnected, IP address conflict, illegal login, HDD full, HDD error), alarm input and output, audio exception detection
Smart Event	audio exception detection, region exiting detection, region entrance detection, intrusion detection, Line crossing detection
Linkage	red and blue strobe light and audio alarm
Deep Learning Function	
Face Capture	Detects up to 5 faces simultaneously, Uploads face with background and closed-up face pictures, Supports detecting, tracking, capturing, grading, selecting of face in motion, and outputs the best face picture
Regional People Counting	Supports up to 8 detection regions, and independent arming schedule and linkage method. Supports 3 detection modes: people density detection, number of people exception detection, waiting time exception detection
Linkage and Tracking	
Smart Linkage	manual tracking, linked tracking capture, tracking in turn
General	
Power	12 VDC, 3.33 A PoE: IEEE 802.3at, 42.5 to 57.2 V, 0.6 A
Dimension	Ø166 mm × 294.8 mm (Ø6.5" × 11.6")
Weight	Approx. 3.0 kg (16.5 lb.)
Material	ADC12
Operating Condition	-30°C to 65 °C (-22°F to 149 °F). Humidity 95% or less (non-condensing)
General Function	mirror, password protection, watermark, IP address filter
Demist	Demist by heating the glass
Approval	
Protection	IP67 (IEC 60529-2013), TVS6000V lightning protection, surge protection and voltage transient protection

• DORI

The DORI (detect, observe, recognize, identify) distance gives the general idea of the camera ability to distinguish persons or objects within its field of view. It is calculated based on the camera sensor specification and the criteria given by EN 62676-4: 2015.

DORI	Detect	Observe	Recognize	Identify
Definition	25 px/m	63 px/m	125 px/m	250 px/m
Distance (Tele)	960.0m (3149.61 ft)	381.0m (1250.0 ft)	192.0m (629.92 ft)	96.0 m (314.96 ft)

Dimension




Accessory Included



















• Optional

DS-1660ZJ	DS-4650ZJ-WC	DS-1663ZJ	DS-1604ZJ-BOX-PO LE	DS-1276ZJ
-----------	--------------	-----------	------------------------	-----------

				
DS-1604ZJ	DS-1604ZJ-BOX-CORNER	DS-1674ZJ	DS-1604ZJ-box	DS-1602ZJ
				
DS-1684ZJ	DS-1604ZJ-corner	DS-1619ZJ	DS-1662ZJ	DS-1661ZJ
				
DS-1604ZJ-pole	DS-4660ZJ-WC	DS-1667ZJ	DS-1673ZJ	DS-1673ZJ
				
DS-1673ZJ				
				

· Installation Methods

Wall Mounting DS-1618ZJ	Wall Mounting DS-1604ZJ	Wall Mounting DS-1604ZJ-box	Wall Mounting DS-1602ZJ	Gooseneck Mounting DS-1660ZJ
----------------------------	----------------------------	--------------------------------	----------------------------	---------------------------------

				
Gooseneck Mounting DS-1619ZJ	Vertical Pole Mounting DS-4650ZJ-WC+DS-1602ZJ+DS-1674ZJ	Vertical Pole Mounting DS-1604ZJ-BOX-POLE	Vertical Pole Mounting DS-1684ZJ+DS-1602ZJ	Vertical Pole Mounting DS-1604ZJ-pole
				
Pendant Mounting DS-1663ZJ	Pendant Mounting DS-1662ZJ	Pendant Mounting DS-1661ZJ	Pendant Mounting DS-1667ZJ	Corner Mounting DS-1276ZJ+DS-1602ZJ
				
Corner Mounting DS-1604ZJ-BOX-CORNER	Corner Mounting DS-1604ZJ-corner	Corner Mounting DS-4660ZJ-WC+DS-1602ZJ+DS-1674ZJ	Junction Box DS-1674ZJ+DS-1602ZJ	Horizontal Pole Mounting DS-1673ZJ+DS-1663ZJ
				
Horizontal Pole Mounting DS-1673ZJ+DS-1662ZJ	Horizontal Pole Mounting DS-1673ZJ+DS-1661ZJ			
				